

Hydrologic Impacts of Multiple Seam Underground and Surface Mining

Jay W. Hawkins and Jon J. Smoyer

A hydrologic assessment of an underground mine complex overlain by extensive surface mining in north central Pennsylvania has been conducted. The mine complex is drained mainly by one discharge point which the flow rate (median of 2,167 L/min.) increased significantly (67%) above background (median of 1,317 L/min.) during the period it took to construct a treatment plant. The source of this discharge rate increase and other unusual hydrologic characteristics were investigated. Subsequent to background monitoring, about 440 hectares of surface mining and reclamation (85% of the recharge area) occurred on numerous seams overlying the underground mines which induced greatly increased infiltration rates. A direct correlation between the surface mined area and increased recharge to the underlying deep mines was observed.

Atypically, in-mine storage does not exist to any substantial degree in the basal Lower Kittanning underground (Elbon) mine from which the main discharge emanates. The overlying Middle Kittanning (Shawmut) mine is the main storage unit for mine water. The Shawmut mine behaves like a perched aquifer system because of the moderate vertical hydraulic conductivity (median rate of 1.0×10^{-7} m/s) of the thin (mean of 11.7 m) clay-rich shale and siltstone interburden and local structural features. During periods of average to low recharge, the majority of the water flowing downward from the Middle Kittanning mine to the underlying Lower Kittanning mine is widespread, diffuse, and Darcian in nature. The discharge rate is consistent within a narrow range of 1,745 to 2,381 L/min, with a median of 2,040 L/min. When surface infiltration rates are high causing the mine pool levels to rise, a portion of the recharge from the Middle Kittanning mine to the lower seam mine is apparently more channelized flowing through the backfill over the buried highwalls and into the underlying Lower Kittanning mine. During these periods, the flow varies greatly from 5,725 to over 11,356 L/min, with a median of 8,328 L/min.

A test injection of 2.8 million liters of iron sludge into the Shawmut mine was successful. The openness of the mine workings and the water quality of the mine pool make it viable to inject iron sludge. Testing of the mine workings indicates that sufficient space exists to accommodate iron sludge disposal for more than 100 years with little recirculation of the iron back through the discharge point.

Introduction: The work conducted during this study was performed at the request of and in cooperation with the Pennsylvania Department of Environmental Protection, Bureau of Abandoned Mine Reclamation Cambria Office in Ebensburg, Pennsylvania. From this point forward, this mine discharge will be referred to as the Brandy Camp discharge.

Shortly after the Brandy Camp treatment plant was completed and operational, it was found to be significantly undersized. During high-flow conditions, the plant treats less than 50% of the mine discharge and the remainder is bypassed to the receiving stream without treatment. Therefore, the first problem to be addressed was why were the baseline (background) discharge measurements much lower than those recorded since the plant came online. A second goal of this project was to conduct a hydrologic characterization of related underground mines to determine potential locations for injection of iron sludge produced at the treatment plant. Presently, this sludge is disposed of and buried in nearby surface mines. Once the last of these surface mines is closed, a new disposal site and/or method will be needed. The sludge injection areas within the underground mines require sufficient storage capacity to allow periodic injection over an extended time period, while at the same time precluding remobilization of the iron back into the mine water. The sections of the mines that receive the iron sludge will need to be adequately open to allow for free flow of the sludge away from the injection point. The in-mine water quality needs to be such that the iron hydroxide in the sludge does not redissolve and thus recycled back to the Brandy Camp discharge.

Background

Site Location: The Brandy Camp discharge and hydrologically associated mines are located adjacent to the town of Brandy Camp in southern Elk County, Pennsylvania, U.S.A. (Figure 1). Brandy Camp is a small former coal mine town approximately 14.5 kilometers northeast of Brockway along State Route 219. The Brandy Camp discharge itself is located approximately 305 meters south-southeast of the town (Figure 1).

Geology: The area of interest is underlain by coal-bearing strata of the Allegheny Group, Pennsylvanian System. The Lower and Middle Kittanning Coal seams are the primary units surface and underground mined in this region. Additional mining, mostly surface mining, has occurred on the Upper Kittanning, Lower Freeport, Upper Freeport, Clarion and various localized split and rider seams. The strata associated with these coals are mainly shales with a few thinly bedded sandstone units. Yost Associates, Inc. (undated) noted the presence of the Lower Freeport Limestone capping the hilltops to the north and east within the drainage area of the Brandy Camp discharge.

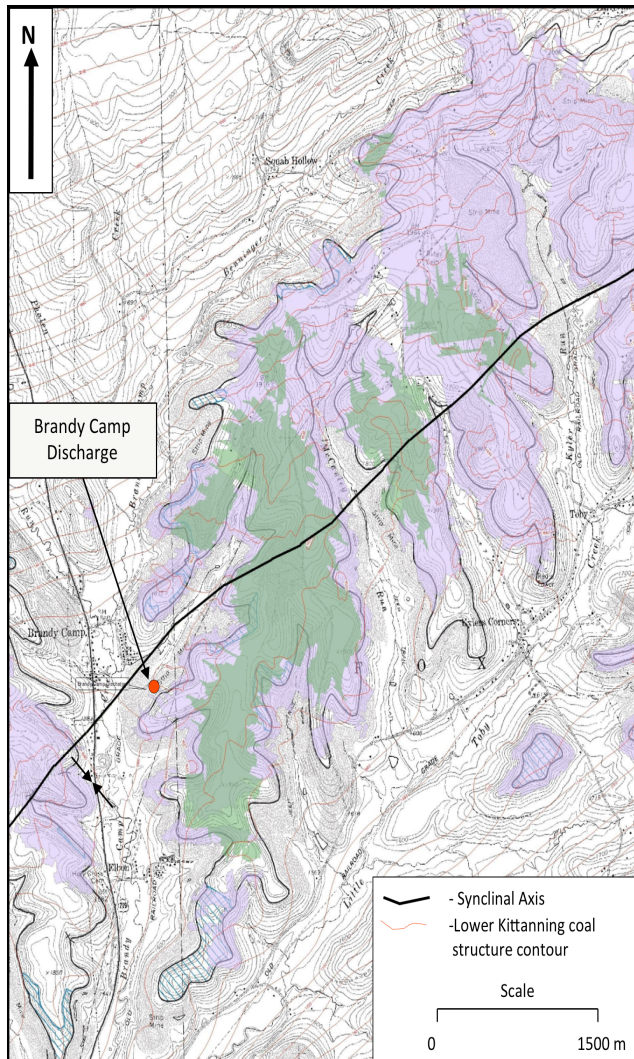


Figure 1. Map of the Brandy Camp discharge and surrounding area. Underground coal mining was in the Middle (green) and Lower Kittanning (amethyst) coals in the Brandy Camp area. Structure contours are from the bottom of the Lower Kittanning Coal.

The strata within the Brandy Camp discharge drainage area are generally low dipping (≈ 2 degrees or less). The southwest to northeast trending Shawmut Syncline bisects the drainage area. The syncline plunges southwest. The synclinal axis lies just north of the Brandy Camp discharge. This structural setting in concert with the deeply-incised topography cause the Brandy Camp discharge to be the principal mine water relief point for the underground mines.

Underground mining in this region began as early as 1864. The underground mines draining to the Brandy Camp discharge began in earnest in the 1870s and continued until the 1930s. Around the time of closure on the Lower Kittanning Elbon mine, mining on the overlying Middle Kittanning coal began in the Shawmut

mine. The Shawmut underground operations continued until about 1959 (Yost Associates, Inc., undated). After the Second World War, surface mining began on the coal outcrop barriers areas. Surface mining on the Lower and Middle Kittanning coals and overlying seams continued until the past few years.

Analysis of the Brandy Camp Discharge: The initial task of this study was to determine if the pre- and post-plant construction discharge rate differences are definite (not random variation). Pre-construction data include flows recorded during plant construction as well. Figure 2 indicates that the median flow rate after plant construction (3,617 L/min.) is significantly higher ($p \leq 0.05$) than the pre-construction median flow rate (2,167 L/min.). The lack of an overlap of the two notches about the median on the notched box-and-whisker plot indicates the post-construction flows are significantly higher. Similar results were obtained analyzing these data using the Student's T-test and Wilcoxon Mann-Whitney U (a nonparametric version of the Student's T-test). The data sets were transformed to approximate a normal distribution in order to conduct the Student's T-test.

Several potential reasons for the pre- versus post-plant construction flow differences were postulated: 1) the pre- and/or post-plant measurements were conducted improperly or the flow measuring device was faulty, 2) the measurement point location changed substantially from background, 3) the surface mining within the basin during the treatment plant construction period impacted the recharge rates, 4) the precipitation/climatic conditions changed substantially during this period, or 5) other anthropogenic activities in the watershed have impacted the mine discharge. Each of these possible reasons was explored. The impacts of precipitation and/or surface mining were considered the most probable causes a priori. Anthropogenic activities were quickly eliminated as there were no other major human-related activities occurring within the watershed.

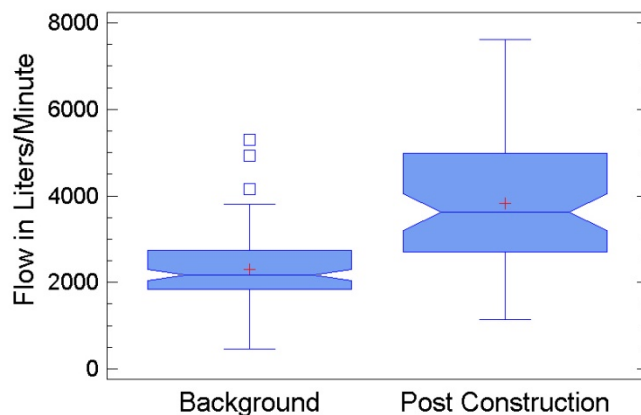


Figure 2. Notched box-and-whisker plot illustrating the flow rate differences observed before and after construction of the treatment plant.

1. Flow Measurements: A sharp-crested rectangular weir near the discharge point was initially installed to determine flow rates prior to plant construction. A replacement broad-crested rectangular weir was installed a “few feet downstream” from the original location during the plant construction (P.J. Shah, personal communication). This short-distance move had no impact on the flow measurements, given that no gain or loss of flow occurred between the two points. A review of the weirs indicates that they were constructed and functioning properly. Discussions with plant personnel indicate that they were reading and recording the discharge rates accurately.

2. Influence of Surface Mining on the Discharge Rate: The large amount of surface mining and reclamation within the recharge area for the Brandy Camp discharge from 1989 to 2005 appears to have

had a substantial impact on the discharge flow rate. The bulk of the surface mining was on coal seams overlying the Middle Kittanning Coal. Surface mining activities occurred in this region for several decades prior to 1989, but the activities within the watershed for the period slightly before, during and after background data collection affected large areas and were of specific interest. A positive correlation was observed between increasing area affected by surface mining and flow rate at the Brandy Camp Discharge (Figure 3). Despite the difficulties in determining flow rate and inherent uncertainties common to natural data the correlation here ($R\text{-squared} = 68.6\%$) is comparatively strong.

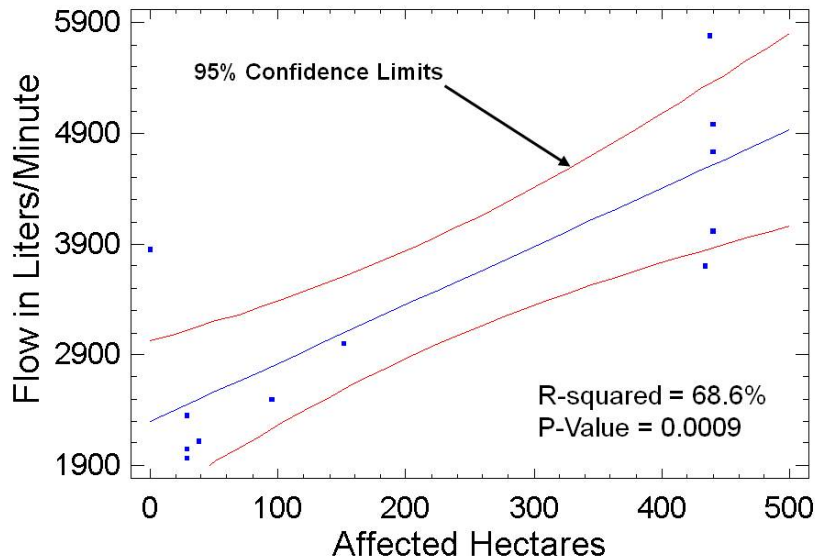


Figure 3. Regression analysis illustrating the relationship of mean annual discharge rate to amount of drainage area affected by surface mining.

When background monitoring for the discharge started in July of 1993, recent surface mining had affected about 40 hectares with 29 hectares already reclaimed. Approximately 174 hectares had been affected with 121 hectares reclaimed by the time background sampling ended in June of 1996. Toward the end of the background sampling period the discharge rates were beginning to noticeably rise (Figure 4). An additional 266 hectares were surface mined and 318 hectares were reclaimed subsequent to the background sampling, 2004 and 2005, respectively. The discharge rates continued to rise during this period more than can be attributed to precipitation variation alone. While much higher than normal precipitation in 2004 is reflected in the discharge average for that year, there was a noticeable trend of increasing flow rates at the Brandy Camp discharge beginning as early as 1996.

In total, 440 hectares were surface mined during this period of interest. The total recharge area for the mines that drain to the Brandy Camp discharge is approximately 520 hectares, so the surface mining during this period affected approximately 85% of the recharge area. This caused an increase of 67% in the annual median flow rate at the Brandy Camp discharge.

During surface mining activities, surface and ground waters are controlled to a large extent. Surface water is collected and diverted to impoundments via ditches. The impoundments and ditches are engineered to prevent infiltration of the water. They are designed to collect runoff and hold it until effluent standards are reached, then discharge the water into the nearest natural drainage way. Ground water encountered in the pit and elsewhere is pumped to treatment ponds and discharged once effluent standards are achieved. This

efficient handling of encountered water precludes recharge to underlying deep mines as much as possible. Therefore, much of the precipitation falling on the areas where active surface mining activities are occurring will be intercepted and diverted until mining is completed and the erosion and sedimentation controls are removed.

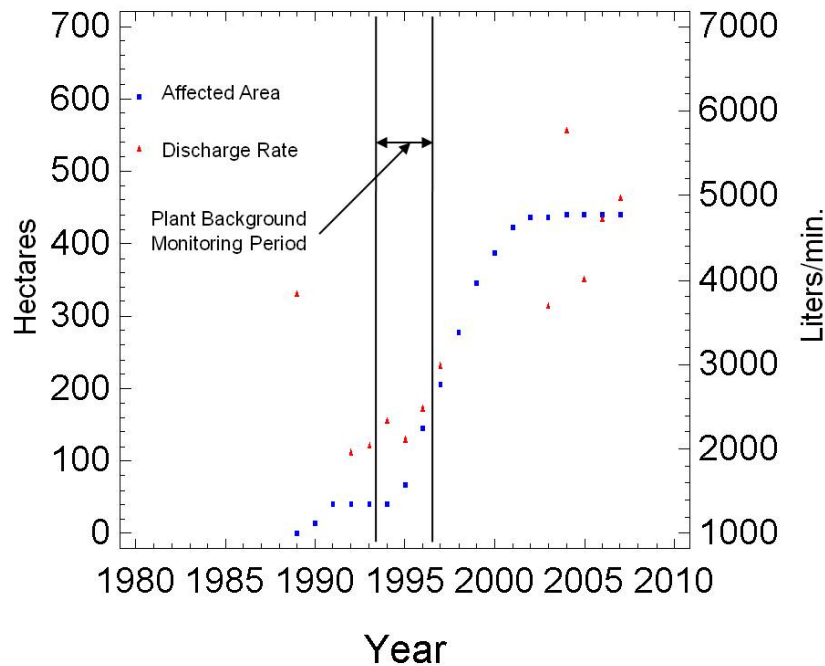


Figure 4. Relationship of surface mine affected acres and mean annual flow rate of the Brandy Camp discharge.

Once the site is backfilled and revegetated, the ditches and ponds are removed and surface water is no longer collected and routed from the site. A significant portion of precipitation or water flowing on to the site from adjacent areas will infiltrate into the spoil and eventually recharge the Middle Kittanning Shawmut mine. Water entering the Shawmut mine does not discharge directly (Yost Associates, Inc., undated), but instead this water forms a perched mine pool and then flows downward into the underlying Lower Kittanning Elbon Mine and is subsequently expressed at the Brandy Camp discharge. This post surface mining change in water handling is a major factor in the increased amount of recharge occurring in the drainage area for the Brandy Camp discharge.

Some earlier studies of the impacts of surface mining and reclamation indicate that infiltration rates are frequently reduced from pre-mining conditions due to loss of soil structure, soil compaction and lack of vegetative cover (Jorgensen and Gardner, 1987). However, within about four years after reclamation, infiltration rates tend to recover to near background levels. Infiltration rate recovery is due to re-establishment of the soil structure, increases to the vegetative cover and increasing surface roughness. Guebert and Gardner (2001) noted that infiltration rates on newly reclaimed minesoils tend to exhibit low steady state infiltration rates of 1 to 2 centimeters per hour (cm/h), but within four years after reclamation the infiltration rates of “some minesoils” approach the premining rates of 8 cm/h. The increased infiltration rates were facilitated by the development of macropores in the minesoil causing the effective reduction of peak runoff rates and dramatically increasing the recession limb of storm events. Analysis of a “heavily

mined” watershed in Indiana showed that the storm runoff averaged 62% of an adjacent “lightly mined” watershed (Corbett, 1968).

Infiltration rates also depend on the degree the material has been regraded or degree of surface roughness. Deane (1966) recorded infiltration rates for ungraded spoils of 10.2 and 23.6 cm/hr and 1.5 and 2.3 cm/hr for the same spoils regraded in Ohio and Illinois, respectively.

Other studies indicate that surface mining greatly increases the infiltration and ground-water storage. Streams fed by baseflow in heavily mined areas tend to continue flowing through protracted drought; whereas streams in adjacent unmined areas exhibit substantially lower baseflow or tend to go dry during these periods (Corbett, 1965). This is indicative of not only higher recharge of the mine spoil, but also spoil aquifers tend to have significantly higher storage capacity of this additional water than undisturbed strata.

The deforestation that precedes the mining may be a major factor in the increased infiltration. Deforestation greatly reduces the evapotranspiration and increases the amount of ground water going into storage (Lieberman and Hoover, 1951; Douglass and Swank, 1975; Dickens and others, 1989). The increase in stream flow, previously noted, was due mainly to the higher baseflow during summer low-flow periods, which is promoted by the decrease in evapotranspiration. The conversion of the original hardwood forest cover to grasses greatly contributes to the infiltration rate increase. The commensurate increases in stream baseflow are directly proportional to the area of deforestation (Douglass and Swank, 1975).

Wiley and others (2001) observed that the 90-percent duration flow (percent of the time the flow is equaled or exceeded) of streams that originate at the toe-of-valley fills is six to seven times greater than nearby streams draining unmined watersheds. Truax (1965) observed that at a time when mined watersheds in southwestern Indiana were yielding about 177 liters per minute per square kilometer (September and October 1964), other nearby watersheds were dry.

Messinger and Paybins (2003) noted that during low-flow periods the normalized discharge rate (i.e. discharge rate per unit area drained) of a heavily surface mined watershed in West Virginia was more than twice the rate of an adjacent unmined watershed. For a complete two year period, total unit flow of the heavily-mined watershed was about 1.75 times greater than the unmined watershed. They attributed much of this change to decreased evapotranspiration due to deforestation, changes in the plant species, and soil characteristics (thin soils retaining less water). The heavily-mined watershed continued to discharge during a protracted dry spell when the unmined watershed stopped flowing. They did, however, attribute some continued baseflow through the summer to increased storage capacity of mine spoil. The substantially increased ground-water storage (i.e. effective porosity) common to mine spoil (Hawkins, 1998), coupled with the increased infiltration facilitated by decreased evapotranspiration would support stream flow from reclaimed mine sites when nearby streams in unmined watersheds go dry. Curtis (1979) stated that spoil can store large quantities of water that eventually discharge as baseflow to the streams. He further states that they “function as reservoirs” of ground-water storage. Peak storm discharge rates show reductions commensurate with the area of the watershed disturbed.

Spoil itself is capable of storing much larger quantities of ground water than the pre-existing strata, so if more water infiltrates into the spoil more of it can be stored and released gradually over longer time periods. Agnew (1966) likened mine spoil to a “sponge” when it comes to recharge. Effective porosity of mine spoils has been measured in the field nearing 20%; and likely at times approaches 25% effective porosity (equal to the spoil swell factor) (Hawkins, 1998). Laboratory spoil porosity values have been recorded as high as 36% (Wells and others, 1982). Whereas, pre-mining porosity values in fractured strata are generally much less than 0.1% (Mackay and Cherry, 1989).

An aerial photo taken in October 1968 of the contributing area for the Brandy Camp discharge indicates that the majority of the land (mottled areas) was heavily forested, whereas a similar aerial photo from 2008 illustrate that much of the area has been mined (Figure 5). Preparation for surface mining removes the trees. Initially, grasses were planted as a vegetative cover once the mines were reclaimed (Figure 6). This drastic change in vegetation alone may account for higher infiltration rates for the areas hydrologically connected to the Brandy Camp discharge. Slowly through plantings and volunteer growth, trees are returning on the

reclaimed mines (Figure 7). Eventually, recharge rates may return to pre-mining levels, but this may take many decades. Douglass and Swank (1975) noted that areas replanted in conifers, specifically white pine, eventually exhibit recharge rates at or somewhat below that of the pre-existing hardwoods. This is due to the higher water interception rate and transpiration losses associated with white pine compared to most hardwoods.



Figure 5. Aerial photograph from October 1968 (left) showing that much of the recharge area for the mines contributing to the Brandy Camp discharge was forested. Aerial photograph from May 2008 (right) showing mined areas.

The increased infiltration, hence recharge to the Elbon mine, caused by surface mining and reclamation is illustrated by the mean percentage of the precipitation that is discharging at the Brandy Camp discharge (Figure 8). The mean percent of precipitation expressed at the Brandy Camp Discharge from 2003 through 2009 was slightly more than 36%. However, the mean percent of precipitation yielded by the Brandy Camp discharge from 1993 through 1996 (the background sampling period) was 20%. The percent of precipitation of the Brandy Camp discharge in 1988 and 1989 (38.5%) was similar to the values recorded in the 2003 to 2009 time period. This earlier high recharge rate may be related to previous surface mining activities that occurred during the preceding years; however, the high percentage appears more likely to be skewed because most of the flows recorded during that period were visual estimates. The extremely low percentage of precipitation noted at the Brandy Camp discharge in 1969 (~7%) was likely caused by considerable evapotranspiration occurring due to the heavy forest cover in the recharge area at that time.

3. Impacts of Precipitation on Discharge Rates: Given that mine discharges are closely related to the antecedent precipitation, if the underestimation of the Brandy Camp discharge rate was related to below normal precipitation, then this should be reflected in the records. The precipitation rates for the period for which background discharge rates were collected (July 1993 through June 1996) fluctuated about the average annual values, but exhibited no unusual trend below or above normal that would have resulted in unusual discharge rates (Figure 9). Annual precipitation data for this area were obtained from the Ridgeway station of the National Oceanic and Atmospheric Administration, which is approximately 12.1 kilometers to the north of the center of the study area.

The precipitation amounts for 1993 through 1996 were well within two standard deviations of the mean of 110.2 centimeters per year (95% confidence interval). Thus, an underestimation of the discharge rate does not appear to be related to abnormal climatic conditions during background data collection. In fact, both 1994 and 1996 exhibited slightly above average precipitation levels; 18.7 and 13.3% above the mean, respectively. The precipitation levels in the time period 2002 to 2006 were also well within the 95% confidence interval about the mean (Figure 9). This indicates that the higher discharge rates exhibited since the plant came on line are not due to periods of abnormally high precipitation.



Figure 6. Grasses growing on recently-reclaimed surface mined areas within the recharge area.



Figure 7. Planted and volunteer trees beginning to populate reclaimed surface mined areas within the recharge zone.

This is not to say that precipitation has no impact on the discharge rate. Since the bulk of the recent surface mine reclamation activities has been completed in 2003 continuing through 2007, the discharge rate exhibits a positive correlation with precipitation albeit weak with sparse data ($R^2 = 51.2$ with a P-Value of 0.174). Whereas, during the period from 1989 to 2002, when substantial surface mining and reclamation was occurring no correlation was seen. Precipitation always exerts some influence on the discharge, but its influence was masked from 1989 to 2002 by the strong water management practices employed during surface mining.

4. Flushing of 2008 Event: Between March 15th and April 5th of 2008, the Brandy Camp discharge experienced flow rates considerably higher than previously recorded. The Brandy Camp area received about 13.5 centimeters of rain during that interval which melted the existing thick snow pack. This snow melt and precipitation caused considerable rapid recharge to the mines. The Brandy Camp discharge

increased to over 11,350 L/min. The exact maximum discharge rate could not be determined due to much of the water being bypassed through an ungauged pipe and ditch system. This flushing event also raised the concentration of acidity, iron, sulfate and other dissolved parameters. A similar type event occurred in the Casselman River watershed in the spring of 1993 when the Shaw Mines complex experienced flushing due to the melting of a higher than normal amount of snow (Ziemkiewicz and Brant, 1997).

There was a distinct change or break in the slope of the flushing event regression hydrograph at approximately the 5,725 L/min discharge rate (Figure 10). This is directly attributable to a substantial change in the recharge rate from the Shawmut Mine to the Elbon Mine.

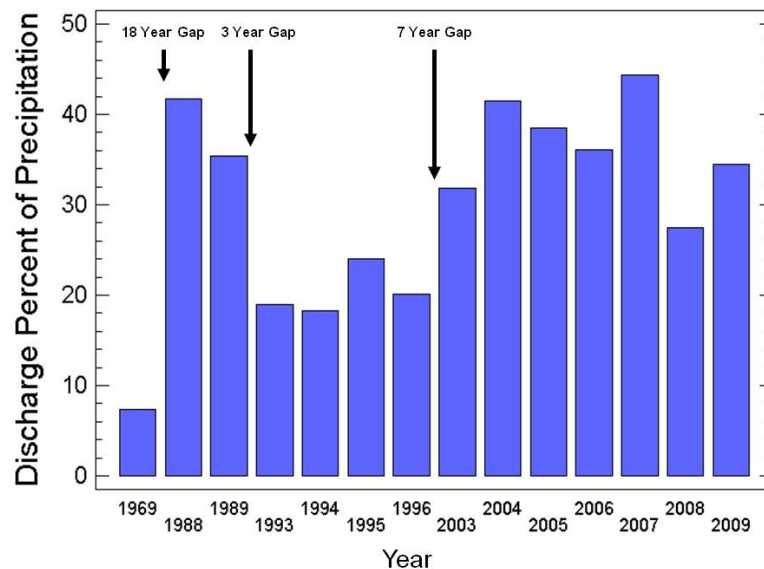


Figure 8. Percentage of recharge from precipitation before and after construction of the treatment plant.

The break in the line curve and the more gradual slope below the 5,725 L/min. discharge rate indicates that the recharge from the Shawmut mine is declining at a rate more consistent with diffuse flow vertically through fractures in the interburden and regulated by the head within the mine. Whereas, when the discharge rate is above the 5,725 L/min rate the regression slope is considerably steeper indicative that a substantial portion of the recharge is more direct and less restricted. The median flow rate quadrupled from 2,040 L/min below the hydrograph line break to 8,328 L/min above the break (Figure 10). The higher discharge rates appear to be caused when the mine water rises to a level where it will spill over the buried surface mine highwalls down through the more transmissive spoil (Hawkins, 1998; Hawkins and Smoyer, 2011) to the Lower Kittanning pit floor, and flow along the pit floor down gradient recharging the Elbon mine through entries buried by previous surface mining. The water level at which the spillover occurs was not known; no monitoring wells existed into the Shawmut Mine at the time of the flushing event and the total extent of the surface mining in the Middle Kittanning coal is unclear. However, on February 9, 2010 the flow rate exceeded 5,725 L/min and the water elevation in the Shawmut mine was 505.6 meters above mean sea level, which indicates this may be the point above which the recharge characteristics become less restricted spillover and the recharge rates greatly increase.

Hydrologic Characterization of the Underground Mine Workings: The second major task in this study was to determine the potential for disposal of iron hydroxide-rich sludge generated at the treatment

facilities into the Middle Kittanning coal Shawmut mine and/or the Lower Kittanning coal Elbon mine. Critical to this undertaking is determining if there is ample storage capacity and if the connection between open entries is unrestricted allowing free flow of the sludge away from the injection borehole. In order for the injection to be efficient, the sludge needs to flow considerable distances from the injection point before the solids settle out. Another concern is if the quality of the water in the mine(s) is such that the iron will not be redissolved and mobilized. It is undesirable to treat iron that is reintroduced by sludge injection.

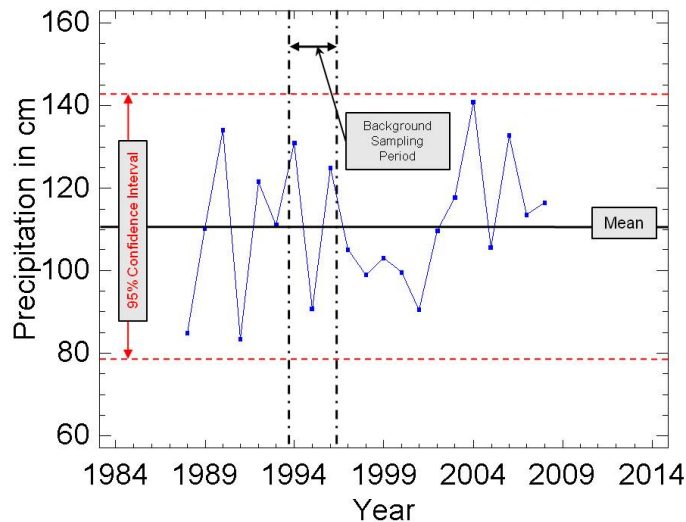


Figure 9. Annual precipitation amounts from 1988 through 2006.

In the Appalachian Plateau, vertically stacked mines situated above the local drainage system tend to drain freely down to the lowest coal seam mined discharging laterally from a structural low point from that stratum. This scenario is not the case for the study area. The hydrologic regime within the study area is distinct because a mine pool is located in the Middle Kittanning Shawmut mine overlying the Lower Kittanning Elbon mine, from which the Brandy Camp discharge drains. Essentially, the Shawmut mine pool is a perched aquifer system above the lower coal seam. The pooled mine water from the Shawmut Mine subsequently flows through the interburden in a diffuse fashion into the Elbon mine. There is no significant pooling within the Elbon mine. Instead, the mine water flows laterally through the open entries and discharges from a structural low point within the mine at the Brandy Camp discharge.

Several monitoring wells installed into the two mines confirm the existence of a perched mine pool in the Shawmut mine. Long term monitoring with pressure transducers/data loggers indicates that the Shawmut mine pool varies in water level and aerial extent seasonally. Whereas, monitoring wells into the Elbon mine shows that it has no pooled water. Water flows along the floor in the Elbon mine and discharges at the intersection of a structural low point and a topographic low.

The interburden between the two coals ranges from 10.0 to nearly 13.6 meters with a mean of 11.7 meters. The interburden strata are comprised primarily of light to dark gray clay-rich shales, claystones, and siltstones. Main headings and sections with minimal second or retreat mining in the Elbon mine tend to be open and show few collapse features; whereas, heavily second mined areas exhibit partial to complete collapse. The strata above the collapsed sections have high-angle fracturing up to at least nine meters above the mine roof. The drilling indicates that the subsidence-induced fractures extend close or completely up to

the Middle Kittanning horizon. The fractures are iron stained indicating that some weathering and/or mineral precipitation has occurred due to ground-water flow through them.

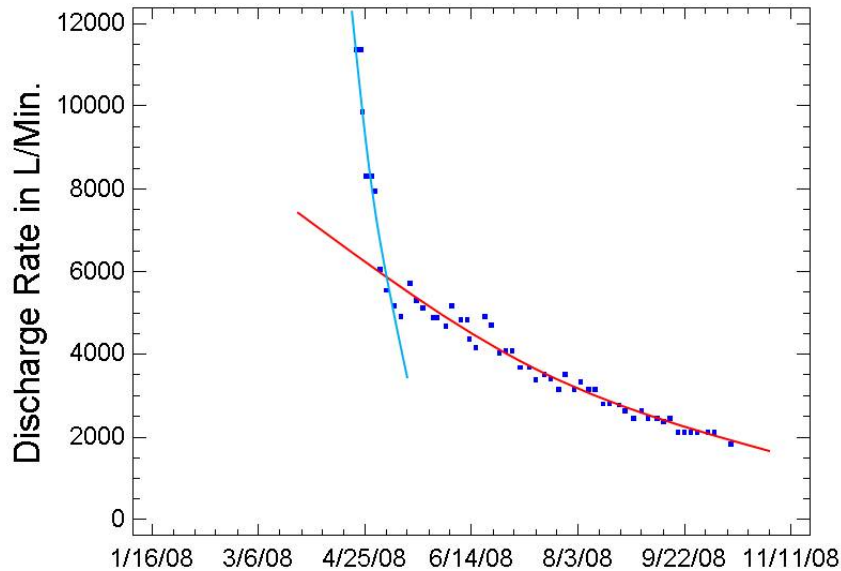


Figure 10. Brandy Camp discharge rate from the spring of 2008.

The high clay content of the interburden attenuates fracture formation from the Lower toward the Middle Kittanning level. The clay-rich strata are somewhat pliable and may deform in addition to fracturing when subjected to stress. Additionally, the clay tends to behave somewhat plastically allowing some self-healing of subsidence-induced and naturally-created fractures; thus reducing permeability and in turn restricting ground-water movement.

The relatively low permeability of the strata is illustrated by the perched mine pool in the Middle Kittanning supported by relatively thin interburden. Vertical hydraulic conductivity (K_v) values corroborate that the interburden as a whole regulates mine water flow from the Shawmut mine pool to the underlying Elbon mine. The K_v values estimated under varying hydrologic conditions (mine pool levels) were estimated using measured mine pool levels, total flooded area, mean interburden thickness and the total discharge rate from the Elbon mine. Vertical hydraulic conductivity of the strata between the two coals ranged from 3.6×10^{-8} to 2.3×10^{-7} meters per second (m/s) with a median of 1.0×10^{-7} m/s. These values are similar to K_v values for unfractured siltstones (Fetter, 1980). While much lower values have been estimated for true aquitard units (e.g., 10^{-12} to 10^{-15} m/s) (Kleeschulte and Seeger, 2005; Eaton and Bradbury, 2003), the interburden here has sufficiently low permeability to support the perched mine pool system.

Drilling into the Shawmut mine indicates that most the workings encountered are open. The drilling targeted primarily main entries which tended to be mined to much greater heights than the coal itself and better supported for continued use. The coal ranges from 0.58 to 0.94 meters with an average of 0.67 meters thick. A few of the drill holes indicate that some collapse and nearly complete convergence has occurred, but the bulk of the entries intersected were close to the original full mining height. The voids

averaged 1.88 meters with a range of 0.80 to 2.70 meters for main entries. This illustrates that at least the main entries are accessible and able to accept large quantities of sludge.

Factors that influence the chemical stability of iron hydroxide sludge in general include the type neutralizing agent used, age of the sludge, whether the sludge was aged submerged in water versus aged when subaerially exposed, and the pH of the environment (water) in which the sludge is placed for disposal. Watzlaf and Casson (1990) noted that iron hydroxide sludge produced from sodium hydroxide (NaOH), calcium hydroxide (Ca(OH)₂), and calcium oxide (CaO) were more stable than that produced from sodium carbonate (Na₂CO₃). They further observed that sludge that was exposed to the atmosphere for a period of time became more stable and insoluble than sludge that was held in a subaqueous state. Prolonged aging produces more stable iron hydroxide sludge especially if the material is subaerially exposed during the aging period (Watzlaf and Casson, 1990). Watzlaf (1988) noted that iron hydroxide was relatively stable down to pH values approaching 3.5 standard units. However, Watzlaf and Casson (1990) noted in their bench studies that regardless of the treatment chemical, aging time and conditions under which the sludge was held (submerged or subaerially exposed), the iron remained insoluble down to a pH of 5.5.

The quality of the mine pool water in the Shawmut mine is considerably better than what discharges at the Brandy Camp discharge. The Shawmut mine water becomes more degraded once it infiltrates into the underlying Elbon mine. The Shawmut Mine pool water is a geochemically suitable environment for the introduction of iron hydroxide sludge. Samples were collected by pumping from monitoring wells and from a portal that was opened up to laterally drain off some of the mine pool water. The geometric average pH is 5.9 with alkalinity concentrations ranging from 77 to 134 mg/L. Acidity concentrations range from 0 to 29 mg/L. Dissolved iron is low, ranging from 0.03 to 0.24 mg/L.

The mine water at the Brandy Camp discharge for 2009 averaged 165 mg/L net acidity (acidity-alkalinity) with a geometric average pH of 5.1. The pH of the Brandy Camp discharge has been slowly rising from approximately 3.0 in July 1988 to 4.6 to 5.4 presently. The mean total iron was 69 mg/L. The water is treated with hydrated lime (calcium hydroxide) to increase the alkalinity and thus raise the pH. Prior to the lime addition, minor aeration of the mine water allows for some of the excess dissolved carbon dioxide to exsolve reducing the carbonic acid content and thus decreasing the amount of lime needed to raise the pH. The mine water is suboxic at the discharge point (\approx 1.2 mg/L dissolved iron) and virtually all of the dissolved iron is in the ferrous state. So, subsequent to the lime addition, the water is aerated a second time by bubbling air through it to speed the introduction of oxygen which facilitates ferrous iron oxidation to ferric. The water is then pumped through a series of tanks where a polymer is added to cause the iron to coagulate. A filter belt press is used to remove the coagulated iron. Excess is sent to settling ponds after the second aeration step by bypassing the rest of the plant.

Sludge Injection Evaluation: A test injection of iron sludge derived from a nearby mine water treatment plant which uses only settling ponds was conducted on July 12 through 14, 2010. Over three days, more than 2.8 million liters of sludge was injected into one of the main entries in the Shawmut mine. Tanker trucks holding 19,600 liters were used to haul the sludge to the site. The sludge averaged 2.43% solids with a range of 1.59 to 3.91%. Water level monitoring noted no change in the mine pool level due to the injection. Only the expected diurnal fluctuations were observed (Figure 11).

Water quality at the Brandy Camp discharge was collected twice daily during the injection and the following two days. Sampling was conducted daily the following week. The sampling was reduced to every other day for the next two weeks and decreased further to twice per week for the next three weeks. The following three weeks the discharge was sampled once each week. Discharge rates were also recorded at the time of sampling. No definite change in the concentration of iron, calcium, sulfate, alkalinity or acidity was observed in the raw samples collected at the Brandy Camp discharge. Median total iron concentration before sludge injection (63.5 mg/L) was unchanged afterward (median of 65.0 mg/L) at a significance level of 95%. No change in the total iron overtime was observed. Iron load showed a definite downward trend after the injection with the median iron load (226 Kg/day) being significantly ($p \leq 0.05$) lower after injection compared to before (270 Kg/day). This was caused by slowing reducing flow rates. The sludge

also contained considerable residual calcium with a concentration of 332 mg/L in the decant water. The calcium concentration and loads at the Brandy Camp discharge exhibited similar trends as the total iron.

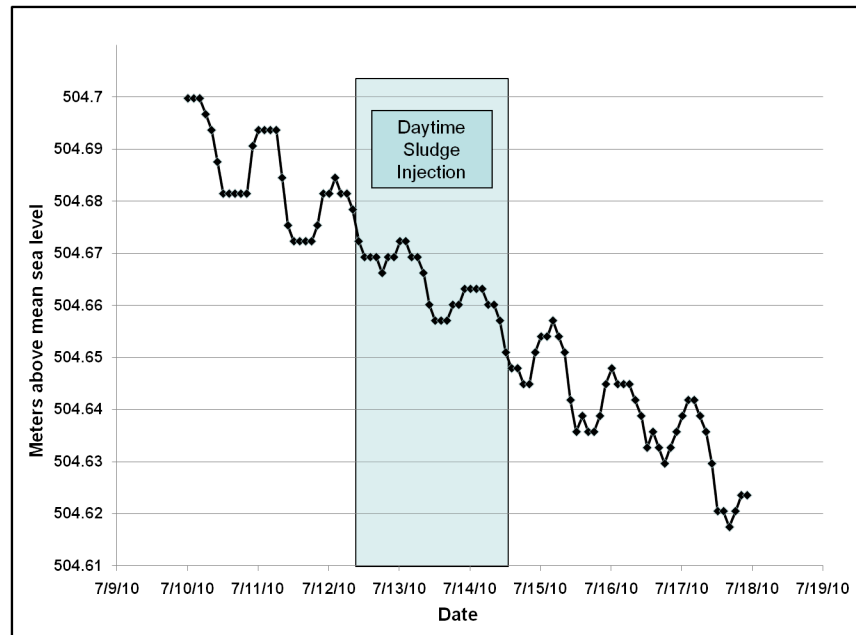


Figure 11. Water levels of the Shawmut Mine pool before, during, and after the test sludge injection. Note only the diurnal fluctuations.

The Brandy Camp iron hydroxide sludge will likely have a solids fraction similar to the sludge used in the injection test, which averaged 2.43%. The volume of just the solids fraction of the sludge is estimated to be 0.19 to 0.22 cubic meters per day or 70 to 80 cubic meters per year. These estimates are based on a specific gravity for iron hydroxide range of 3.4 to 3.9 and the average loading rate for iron at the discharge from November 2008 through November 2009 (390 kilograms/day). It should be noted that these solids fraction calculations are estimated on the smallest volume possible from 2.5% solids (i.e. completely dewatered). It is probable that the sludge will retain some of its water composition. Therefore, an upper level quantity estimate of sludge material, based on no loss of water, indicates that the volume will be approximately 7.7 to 8.8 cubic meters per day or 2,800 to 3,215 cubic meters per year. The actual sludge volume once injected into the mine should eventually be closer to the 100% solids than that of the raw sludge as the water decants from the sludge over time.

The Middle Kittanning coal averages 0.67 meters thick across the area. The extraction rate for the Shawmut mine was estimated at approximately 60%, but the drilling indicates there has been subsequent subsidence which reduces the effective porosity. Hawkins and Dunn (2007) calculated an effective porosity of 11% for similarly-worked underground mines in Cambria County, Pennsylvania. Those mines have likely experienced greater reduction of the voids than the Shawmut mine due to a slightly higher extraction rate (about 63%) which leaves less support and the greater stresses created by the thicker overburden, up to 640 feet over much of the complex. Based on the aforementioned information, it is likely that the effective porosity of the Shawmut mine will be greater than the value given by Hawkins and Dunn (2007), but less than the assumed 60% extraction rate.

Established by a series of calculations using the total sludge volume, solids fraction volume, and an effective porosity range of 10 to 60 percent, the rate of void-filling is estimated between 0.02 and a maximum of 4.50 hectares per year at the current sludge production rate. The central value of 35% effective porosity is probably a reasonable conservative starting point to estimate the area needed to inject sludge. An effective porosity of 35% should have a sludge filling rate of 0.03 and 1.28 hectares per year. Given the propensity of iron hydroxide to settle out of solution at extremely slow flow rates of mine water

within underground mines, the sludge in-filling rate will be closer to the 0.03 hectares per year and in any event should be well below a hectare per year.

Based on the void-filling calculations and experience with sludge injection at other mines in the region, the injection holes should last several years. The need for future injection holes will be predicated to some extent by the ability for the sludge to flow within the mine. Testing of the sludge with various mixtures of water will help determine the degree of flow from the injection point that can be anticipated.

Discussion and Conclusions: Substantial increases in infiltration rates in overlying reclaimed surface mined areas have caused a significant increase in the flow rate at the Brandy Camp discharge. Reclaimed mine spoil not only allows a greater percentage of precipitation to infiltrate, it is capable of storing larger quantities of ground water and releasing it to the underlying mines slowly so flow rates during dry spells are higher than they were previously. Replacement of hardwood forest cover with grasses contributes to the increased infiltration rates. As tree cover, mainly white pine, increases over time, the infiltration rates will likely decrease and may eventually return to near pre-surface mining levels.

Analysis of the area affected by surface mining with respect to the average annual discharge rate indicates that the flow rate increases approximately 1.2 liters per minute for each hectare disturbed. While this does not appear to be a significant amount compared to the total discharge rate, once several hundred hectares were disturbed, the overall flow rate exhibited a substantial increase.

Use of multiple regression analyses to predict the mean annual discharge rate (dependent variable)(liters per minute) based on the independent variables of percent of the recharge area affected (hectares) and annual precipitation (centimeters), illustrates that the impact of those two variables is much stronger than either single parameter on precipitation. An R-squared value of 88.5% with a P-value of 0.0002 was obtained for an equation for the fitted line (Equation 1).

$$\text{Mean annual discharge rate} = -164.363 + (30.2203 \times A) + (18.611 \times P) \quad (1)$$

Where: A = recharge area affected (in hectares)

P = precipitation (in centimeters)

Future situations where a substantial portion of the recharge area for surface and/or underground mine discharges will be impacted by additional surface mining, both the area to be disturbed and the annual precipitation need to be factored into expected and observed changes in the mean annual discharge rate. Of the two parameters, the deforestation and physical disturbance associated with surface mining exert the biggest impact. Equation 1 or something similar developed on a region-specific basis could be employed to predict future discharge rates.

The relatively low vertical hydraulic conductivity (1.0×10^{-7} m/s) of the thin (11.7 m) interburden between the Middle and Lower Kittanning coals supports a perched mine pool within the upper mine. The low vertical hydraulic conductivity is directly related to the clay-rich strata of the interburden which inhibits ground-water flow through subsidence-induced fractures from extending up from the Elbon mine.

The open conditions of the Shawmut mine workings and the chemical quality of the water in the mine make it a feasible option for iron sludge disposal by injection through boreholes drilled constructed specifically for that purpose. The iron sludge injection test was on all accounts successful. The water quality of the Shawmut mine is such that redissolution of the iron hydroxide is unlikely to occur. The rate of mine void filling from the iron sludge is calculated to be well less than one hectare per year. With the amount of available abandoned underground works associated with the Shawmut mine and at the present sludge production rate, there should be sufficient space for injection disposal for well over 100 years. Sludge production will likely diminish with time as the effluent iron and acidity concentrations likewise decrease from natural amelioration. Lower acidity concentrations allow the use of less lime.

Recommendations: In order to reduce the amount of mine water that ultimately must be treated, the recharge rate needs to be reduced for the areas overlying the underground mines. Reforestation of the

overlying areas which are hydrologically connected to the Elbon mine and the Brandy Camp discharge is highly recommended. White Pine, based on its propensity to intercept and utilize infiltrating water, may be the optimal tree species choice. Planting of various high water-use hardwoods is also a good recommendation.

A drilling program has been conducted in the potential sludge injection areas to determine the conditions of the mine workings in the Middle Kittanning Shawmut mine. Additional drilling and evaluation of the mine workings is recommended to more adequately assess the degree of openness and free interconnection of the mine workings to refine the estimate of available storage. Injection of iron sludge from the Brandy Camp treatment plant into the Shawmut underground mine is recommended.

References

Agnew, A.F. 1966. A Quarter to Zero- Surface Mining and Water Supplies, Mining Congress Journal, pp. 29-40.

Corbett, D.M., 1965, Runoff Contributions to Streams from Cast Overburden of Surface Mining Operations for Coal, Pike County, Indiana, Water Resources Research Center, Indiana University, Report of Investigations No. 1, 67 p.

Corbett, D.M., 1968, Ground-Water Hydrology Pertaining to Surface Mining for Coal—Southwestern Indiana, Second Symposium Coal Mine Drainage Research, Coal Ind. Adv. Comm. Ohio River Valley Water Sanit. Comm. Pittsburgh, PA, pp. 164-189.

Curtis, W.R., 1979. Surface Mining and the Hydrologic Balance, Mining Congress Journal, July 1979, pp. 35-40.

Deane, J.A. 1966. How Strip Mining Improves Mid-West Water Supplies, Coal Age, May 1966, pp. 66-68.

Dickens, P.S., R.A. Minear, B.A. Tschantz, 1989, Hydrologic Alteration of Mountain Watersheds form Surface Mining, Journal of the Water Pollution Control Federation, Vol. 61, No. 7, pp. 1249-1260.

Douglass, J. E. and W. T. Swank, 1975, Effects of Management Practices on Water Quality and Quantity: Coweeta Hydrologic Laboratory, North Carolina, Symposium Proceedings: Municipal Watershed Management, pp. 1-13.

Eaton, T.T. and K.R. Bradbury, 2003, Hydraulic Transience and the Role of Bedding Fractures in a Bedrock Aquitard, Southeastern Wisconsin, USA, Geophysical Research Letters, Vol. 30, No. 18, pp. 4-1 to 4-5.

Fetter, C.W., 1980, Applied Hydrogeology, Charles E. Merrill Publishing Co., Columbus, OH, 488 p.

Guebert, M.D. and T.W. Gardner, 2001, Macropore flow on a reclaimed surface mine: infiltration and hillslope hydrology, Geomorphology, Vol. 39, pp. 151-169.

Hawkins, J. W., 1998, Hydrogeologic Characteristics of Surface-Mine Spoil, Chapter 3, Prediction and Prevention of Mine Drainage Pollution in Pennsylvania, Pennsylvania Department of Environmental Protection, Harrisburg, PA, pp. 3-1 to 3-11.

Hawkins, J. W. and M. L. Dunn, 2007, Hydrologic Characteristics of a 35-Year-Old Underground Mine Pool, Mine Water and the Environment, Vol. 26, No. 3, pp. 150-159.

Hydrologic Impacts of Multiple Seam Underground and Surface Mining: A Northern Appalachian Example, J. W. Hawkins and J. J. Smoyer, Mine Water and the Environment, Vol. 30, No. 2, 2011, 11 p.

Jorgensen, D.W. and T.W. Gardner, 1987, Infiltration Capacity of Disturbed Soils: Temporal Change and Lithologic Control, Water Resources Bulletin, Vol. 23, No. 6. pp. 1161-1172.

Kleeschulte, M.J. and C.M. Seeger, 2005, Stratigraphy and Vertical Hydraulic Conductivity of the St. Francois Confining Unit in the Viburnum Trend and the Evaluation of the Unit in the Viburnum Trend and Exploration Areas, Southeastern Missouri, U.S. Geological Survey, Water-Resources Investigations Report 03-4329, p. 63.

Lieberman, J. A. and M. D. Hoover, 1951, Stream-Flow Frequency Changes on Coweeta Experimental Watersheds, Transactions of the American Geophysical Union, Vol. 32, No. 1, pp. 73-76.

Mackay, D. M. and J. A. Cherry, 1989. Groundwater Contamination: Pump-and Treat Remediation, Environmental Science Technology, Vol. 23, No. 6, pp. 630-636.

Messinger, T. and K. S. Paybins, 2003, Relations Between Precipitation and Daily and Monthly Mean Flows in Gauged, Unmined and Valley-Filled Watersheds, Ballard Fork, West Virginia, 1999-2001, Water-Resources Investigations Report 03-4113, U. S. Geological Survey, 51 p.

Truax, C.N., 1965, Water Storage Potential of Surface Mined Coal Lands, Mining Congress Journal, November 1965, pp.40-46.

Watzlaf, G. R., 1988, Chemical Stability of Manganese and Other Metals in Acid Mine Drainage Sludge, Proceedings of the American Society of Surface Mining and Reclamation, Pittsburgh, PA, pp. 83-90.

Watzlaf, G. R. and L. W. Casson, 1990, Chemical Stability of Manganese and Iron in Mine Drainage Treatment Sludge: Effects of Neutralization Chemical, Iron Concentration, and Sludge Age, Proceedings of the Mining and Reclamation Conference and Exhibition, Charleston, WV, pp. 3-9.

Wells, L.G., A.D. Ward, and R.E. Phillips. 1982. Infiltration Characteristics of Kentucky Surface Mine Spoil and Soils, In Proceedings of the 1982 Symposium on Mining, Hydrology, Sedimentology, and Reclamation, Lexington KY, pp. 445-456.

Wiley, J. B., R. D. Evaldi, J. H. Eychaner, and D. B. Chambers, 2001, Reconnaissance of Stream Geomorphology, Low Streamflow, and Stream Temperature in the Mountaintop Coal-Mining Region, Southern, West Virginia, 1999-2000, Water-Resources Investigations Report 01-4092, 34 p.

Yost Associates, Inc., undated, Toby Creek Mine Drainage Pollution Abatement Project Part of Operation Scarlift, Commonwealth of Pennsylvania, Harrisburg

Ziemkiewicz, P. F. and D.L. Brant, 1997, The Casselman River Restoration Project, Presented at West Virginia Surface Mine Drainage Task Force Symposium. Morgantown, WV